


COMPACT RML-R Series

Embedded Railway Computer with Intel® Atom™ E3900 processor

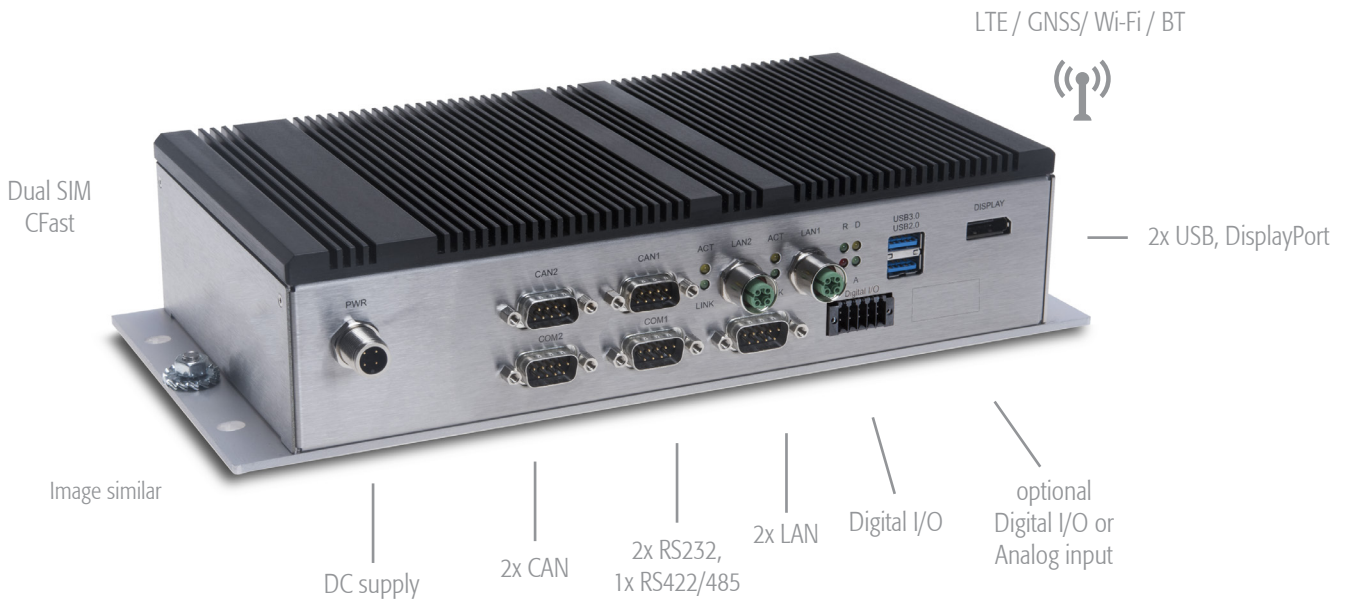

IPC/RML-R 81

This fanless RML-R COMPACT81 generation is based on the Intel® Atom™ E3900 (Apollo Lake) processor technology and offers a wide range of interface options. The robust and uncompromising industrial design allows the implementation in the most demanding rolling stock applications and guarantees long term availability.

- **Railway approved (EN50155 & EN45545)**
- **24/7 continuous operation**
- **M12 connectors for Power and LAN**
- **Shock and vibration resistant**
- **Full -40...+85°C on component level**



Product Highlights

Power Ignition controller
 Inertial Measurement Unit (IMU)
 GNSS with dead reckoning
 Fanless, No moving parts
 Maintenance free
 Long term availability

Product Features

Intel® Atom™ E3900 Series
 up to 2.0GHz, 4 Cores
 RAM soldered on board 8GB
 Socket for CFast storage card
 Gbit Ethernet, USB 3.1, RS232, CAN
 Digital I/Os
 Optional 5G, 4G, Wi-Fi & Bluetooth options
 Rugged M12 connectors
 Stainless steel housing
 Protection class IP40

Markets / Applications

Railway (rolling stock)
 Transportation

Processor / Performance

Intel® Atom™ x7-E3950 2.00GHz (Burst) | 1.6GHz Clock - Quad Core | 8GB RAM •
 Intel® Atom™ x5-E3940 1.80GHz (Burst) | 1.6GHz Clock - Quad Core | 4GB RAM optional

Memory

L2 cache 2MB
 RAM DDR3L 1866MT/s soldered on board 8GB

Features

Inertial measurement unit (IMU) STMicroelectronics ISM330DHCXTR •
 Real time clock (RTC) with goldcap backup (holds charge for 48h) •
 Hardware watchdog & Temperature supervisor •
 Intelligent power management (Ignition controller) •
 TPM 2.0 according to ISO/IEC11889 Infineon SLB9665 •

Communication Interfaces

DisplayPort 1.4 (up to 7680 x 4320 @ 60Hz) 1
 USB version 3.1 (Type A) 1
 USB version 2.0 (Type A) 1
 Ethernet 10/100/1000 BASE-T (Intel I210-IT) (M12 female x-coded) 2
 CAN 2.0A/2.0B & CAN FD (PEAK FPGA chip, SJA1000 compatible), isolated, (DSUB9) 2
 The CAN signals give no network feedback and are attached via non-volatile I/O port on the I2C bus
 Serial RS232, isolated (DSUB9) 2
 Serial RS422/485 (DSUB9) 1
 Digital I/O, 24VDC (latency <1ms) (Weidmüller terminal block) 4 inputs, 4 outputs
 Analog input, 16bit resolution, voltage input: -10 ... +10V / 0 ... 30V or current input: 0-20mA Accuracy: +/- 0.1% optional
 CFast socket with retention frame ² 1
 M.2 Key B socket ² (M.2 3042) 1
 M.2 Key E socket ² (M.2 2230) 1
 Mini PCIe socket ² 1
 MicroSD Card socket ² 1
 Buzzer ² 1
 I2C bus ² 1

Wireless Connectivity

Cellular 4G module (3G/2G fallback) Sierra Wireless EM7455 - M2M only! 2x SMA
 with dual nano SIM support
 Wireless LAN IEEE 802.11ac/a/b/g/n/ dual-band 2x2 MIMO SparkLAN WxxB-263ACNI(BT) 2x RP-SMA
 GNSS positioning module with dead reckoning u-blox NEO-M9 Module ³ 1x SMA
 Cellular 5G module (4G/3G fallback) Sierra Wireless EM9191 - M2M only! (2x SMA) optional
 High accuracy GNSS positioning module w/ RTK support u-blox ZED F9P/F9R module (1x SMA) optional

Technical Data

Exterior dimensions [mm] w262 x h64 x d137
 Net weight [gram] ~1900
 Input voltage (isolated and reverse polarity protected) (M12 4P male a-coded) 16.8 ... 45VDC
 Wide input voltage 14.4 .. 137.5VDC (isolated and reverse polarity protected) (M12 4P male a-coded) optional
 Uninterruptible power supply (UPS), interruption time of supply voltage ~10-15s
 Current consumption typ. in mA @ 24V without Add-Ins, idle ~500
 Power consumption typ. in Watt @ 24V without Add-Ins, idle ~12

Environmental Conditions

Operating temperature (complies with EN50155 class OT4) ⁴ -40°C ... +70°C
 Storage temperature -40°C ... +85°C
 Ingress Protection standard EN60529 IP40
 Conformal coating ⁵ PCX
 Shock IEC/EN 61373
 Vibration IEC/EN 61373
 EMI-Conformity EN 50121-3-2 (IEC 62236-3-2)
 Safety (designed to meet) EN 62368-1
 Fire protection EN45545-2 HL3
 Radio and Telecommunication (designed to meet) RED
 MTBF @ 25°C according to Telcordia SR-332, Environment GB, excluding optional extensions ~480 000h

¹ Please contact factory for minimum order quantities² Internal connector³ NEO M9 Series, NEO-M9V (with dead reckoning) is planned, however subject to availability the NEO-M9N (without dead reckoning) may be used prior.⁴ Depending on installation situation and interface connection. Please see user documentation.⁵ On all possible components (excl. connectors and wireless devices)

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2021 Syslogics Datentechnik AG
 All rights reserved

Syslogics Datentechnik AG
 Täferstrasse 28
 CH-5405 Baden Dättwil

Version 0.6 | October 2021

For further information and support:
info@syslogics.com
support@syslogics.com
www.syslogics.com

+41 56 200 90 40 Switzerland (Headquarters)
 +49 7741 967 14 20 Germany and Austria

 **syslogics**
 industrial computing